

25 Tons Fifth Wheel Wrecker Attachment DTU Towing Unit Customization

Our Product Introduction

for more products please visit us on hbitruck.com

Basic Information

- Place of Origin: Hubei, China
- Brand Name: iTruck
- Minimum Order Quantity: 1
- Price: \$35000/units
- Packaging Details: Nude, covered with protection film
- Delivery Time: 65 days
- Supply Ability: 5 unit/month



Product Specification

- Product Name: DTU
- Dimensions (L X W X H) (mm): 6000x1500x2680mm
- Condition: New
- Drive Type: 6*4 Driving/4x2 Driving
- WheelBase: As Required
- Main Winch: 10 Tons, 2 Pcs
- Auxiliary Winch: Optional
- Underlift: G70, 3 Sections
- Boom: G70, 2 Sections
- Remote Control: Wireless
- Hydraulic: DOT Certified
- Warranty: 2 Year
- Highlight: 25 Tons Fifth Wheel Wrecker Attachment,
25 Tons DTU Towing Unit,
DTU Towing Unit Customization



More Images



Product Description

Product Description

The DTU (Detachable Towing Unit) series has different capacities from 10 tons to 30 tons.


The 25 tons unit comes standard with 2 pcs of 22,000 lb planetary winch, 150' of 7" wire rope and front legs that allow the unit to be easily removed in a matter of minutes so your truck can be multi-functional for both towing and pulling trailers. The DTU is designed to secure to your truck using a front lock-down bracket and your Fifth Wheel Plate. The power for the unit is provided by an hydraulic pump system, with quick connect couplers, which is installed on your truck. The DTU also comes with standard joystick remote control, it supports stable and safe operation.

Main Features

1. 20 Tons / 44100 lbs. Planetary Winch, 10 Tons, 2 Pcs
2. 25 Tons / 55100 lbs. Underlift Capacity, Tow Rate At Least 50 Tons / 110200 lbs.
3. Joystick Remote Control
4. Stainless Steel Tool Boxes
5. Low Profile Crossbar, min 12cm / 5.12 inch

Specs

25 Tons DTU				
No.	Item	Content	Details	Unit
1	Name	25 Tons DTU		
2	Winches	2×10 Tons Main Winches		
3	Underlift	Underlift	G70 material, 3 stage	
4	Boom	Boom	G70 material, 2 stage, hexagon	
5	Stand	Front Manual Stand		
6	Toolbox	Stainless Steel		
7	Hook-Ups	Air and Electrical Hook-Ups	12V or 24V	
8	Control	Remote Wireless Control	Joystick type, chest mount, English Indication	
		Hand Manual Control	On Lift and Right Side, English Indication	
9	Hydraulic Parts	Hydraulic Pump		
		Hydraulic Hose		
		Hydraulic Connector		
		Valves		
		Cylinders		
10	Attachments	5 Sets of Forks	4 sets for axle, 1 set for suspension	
		U shape tyres holder	1 set	
		Safety Chains	2 pcs	
11	Painting and Indication	Electrophoresis Painting	Boom, underlift and side boxes EP Painting	
		Surface Painting	Epoxy Resin	
		Indication	English Indication and Marks as per Miller	
		Packaging	Boxes and underlift protected for the painting	
Specifications				
1	Underlift	Retracted Lifting Capacity	25000	kg
		Retracted Length	2100	mm
		Extended Lifting Capacity	6500	kg
		Extended Length	3200	mm
		Undelift Tilt	-10	°
		Towing Capacity	50	ton
2	Boom	Retracted Lifting Capacity (45°)	20	ton
		Extended Lifting Capacity (45°)	11.5	ton
3	Main Winches	Quantity	2	pcs
		Pulling Power	10	ton
		Type	Planetary	
		Steel Wire Length	45	m
		Steel Wire Diameter	18	mm

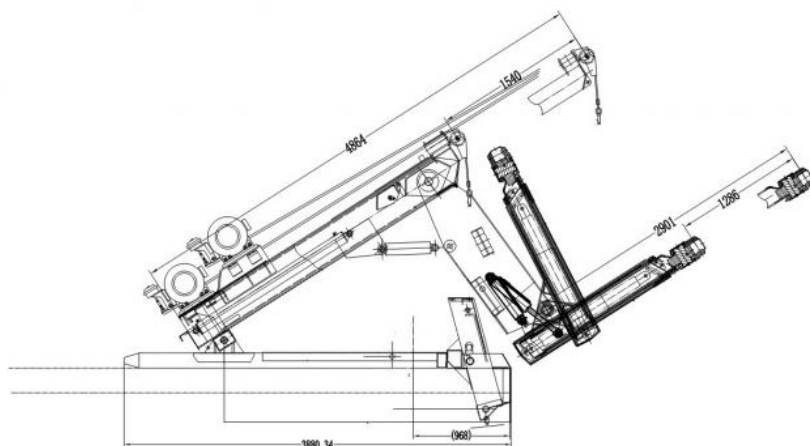

ITRUCK
SPECIAL VEHICLES

Hubei iTruck Import and Export Trading Co., Ltd

☎ 0086 19947597881

✉ alex@hbitruck.com

🌐 hbitruck.com

ROOM B1084 FLOOR 9TH-14TH, BUILDING A, BAOYE CENTER, NO. 31ST, JIANSHE FIRST ROAD,
QINGSHAN DISTRICT, WUHAN