10 Tons To 30 Tons Tractor Wrecker Fifth Dtu 5th Detachable Tow Unit

Basic Information

- Place of Origin:
- Hubei, China iTruck

1

65 days

5 unit/month

\$21,000-41,000/units

Nude, covered with protection film

- Brand Name:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Supply Ability:



Product Specification

 Product Name: 	DTU
 Dimensions (L X W X H) (mm): 	6000x1500x2680mm
Condition:	New
• Drive Type:	6*4 Driving/4x2 Driving
• WheelBase:	As Required
Main Winch:	10 Tons, 2 Pcs
Auxiliary Winch:	Optional
Underlift:	G70, 3 Sections
• Boom:	G70, 2 Sections
Remote Control:	Wireless
Hydraulic:	DOT Certified
Warranty:	2 Year
• Highlight:	30 Tons Tractor Wrecker, 30 Tons Detachable Tow Unit,

10 Tons Detachable Tow Unit

Product Description

10 TONS TO 30 TONS TRACTOR CONVERTED WRECKER FIFTH DTU 5TH DETACHABLE TOW UNIT

The DTU (Detachable Towing Unit) series has different capacities from 10 tons to 30 tons.


The 25 tons unit comes standard with 2 pcs of 22,000 lb planetary winch, 150' of 7" wire rope and front legs that allow the unit to be easily removed in a matter of minutes so your truck can be multi-functional for both towing and pulling trailers. The DTU is designed to secure to your truck using a front lock-down bracket and your Fifth Wheel Plate. The power for the unit is provided by an hydraulic pump system, with quick connect couplers, which is installed on your truck. The DTU also comes with standard joystick remote control, it supports stable and safe operation.

Main Features

- 1. 20 Tons / 44100 lbs. Planetary Winch, 10 Tons, 2 Pcs
- 2. 25 Tons / 55100 lbs. Underlift Capacity, Tow Rate At Least 50 Tons / 110200 lbs.
- 3. Joystick Remote Control
- 4. Stainless Steel Tool Boxes
- 5. Low Profile Crossbar, min 12cm / 5.12 inch

Specs

	ons DTU			
No.	Item	Content	Details	Unit
1	Name	25 Tons DTU		
2	Winches	2×10 Tons Main Winches		
3	Underlift	Underlift	G70 material, 3 stage	
4	Boom	Boom	G70 material, 2 stage, hexagon	
5	Stand	Front Manual Stand		
6	Toolbox	Stainless Steel		
7	Hook-Ups	Air and Electrical Hook-Ups	12V or 24V	
8	Control	Remote Wireless Control	Joystick type, chest mount, English Indication	
		Hand Manual Control	On Lift and Right Side, English Indication	
9	Hydraulic Parts	Hydraulic Pump		
		Hydraulic Hose		
		Hydraulic Connector		
		Valves		
		Cylinders		1
10	Attachments	5 Sets of Forks	4 sets for axle, 1 set for suspension	
	-	U shape tyres holder	1 set	1
		Safety Chains	2 pcs	1
11	Painting and Indication	Electrophoresis Painting	Boom, underlift and side boxes EP Painting	
	-	Surface Painting	Epoxy Resin	1
		Indication	English Indication and Marks as per Miller	
		Packaging	Boxes and underlift protected for the painting	
Spec	ifications			
1	Underlift	Retracted Lifting Capacity	25000	kg
		Retracted Length	2100	mm
		Extended Lifting Capacity	6500	kg
		Extended Length	3200	mm
		Undelift Tilt	-10	0
		Towing Capacity	50	ton
2	Boom	Retracted Lifting Capacity (45°)	20	ton
		Extended Lifting Capacity (45°)	11.5	ton
3	Main Winches	Quantity	2	pcs
		Pulling Power	10	ton
		Туре	Planetary	
		Steel Wire Length	45	m
	İ	Steel Wire Diameter	18	mm

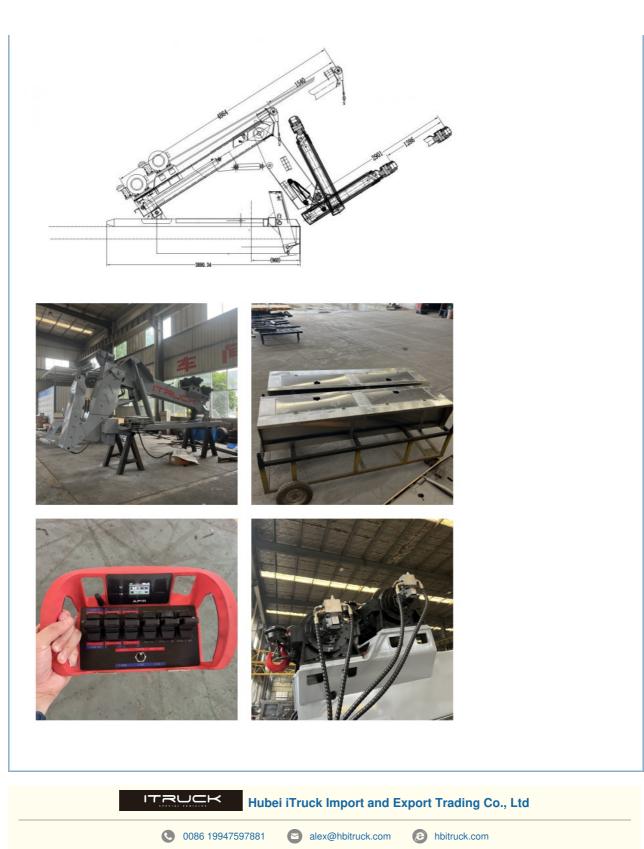

ROOM B1084 FLOOR 9TH-14TH, BUILDING A, BAOYE CENTER, NO. 31ST, JIANSHE FIRST ROAD, QINGSHAN DISTRICT, WUHAN