

8x4 Sinotruck Howo Hook Lifting Arm Garbage Truck With 20 Cbm Bucket

Our Product Introduction

for more products please visit us on hbitruck.com

Basic Information

- Place of Origin: Hubei
- Brand Name: Sinotruck
- Certification: ccc
- Minimum Order Quantity: 1
- Price: \$ 63,500
- Packaging Details: nude with waxing
- Delivery Time: 30-35 working days
- Payment Terms: L/C, T/T, Western Union, D/P, D/A
- Supply Ability: 50 units per month



Product Specification

- Name: 26 Tons Hook Lifting Truck
- Dimension(LxWxH): 9650x2550x3200 Mm
- Total Mass: 31000 Kg
- Rated Payload: 13100 Kg
- Kerb Weight: 17770 Kg
- Manufacturer/Model: MC07.34-60
- Rated Power: 250kw/340hp
- Loading Weight: 26T
- Hook Type: Extend
- Hook Height: 1570 Mm
- Corresponding Box Length: 4250-6500mm
- Equipment Weight: 2000KG
- Whole Machine Weight: 2350KG
- Maximum System Pressure: 32MPa
- Recommended Traffic: 110L/min



More Images



Our Product

Product Description

8x4 Sinotruck howo hook lifting arm garbage truck with 20 cbm bucket

Hook arm garbage truck, also known as carriage detachable garbage truck, is a vehicle dedicated to collecting and transporting various types of garbage, especially suitable for various places such as municipal sanitation, property management, and large factories and mines. The design of this garbage truck aims to improve transportation efficiency, reduce costs, and minimize secondary pollution.

Design features: The hook arm garbage truck adopts a fully hydraulic control operating system, and the garbage bin

and chassis can be completely separated. It has the advantages of reasonable structure, easy operation, stability, high efficiency, good sealing performance, and convenient dumping. This design allows a vehicle to work in conjunction with multiple garbage bins for circular transportation, fully improving the vehicle's transportation capacity.

Function and application: In addition to being used for transporting garbage, the hook arm garbage truck can also be used for transporting sand and gravel materials in engineering fleets. Its high-strength hook arm and large capacity garbage bin design can carry a large amount of sand and gravel materials, making it convenient and fast to transport to the destination. In addition, in the field of construction waste transportation, hook arm garbage trucks have also performed well. Their fully enclosed garbage bin design simplifies the operation process, improves safety, and effectively prevents secondary pollution and noise pollution.

Structural composition: The hook arm garbage truck is a specialized device and garbage bin composed of a garbage box hook arm series tilting mechanism added to the chassis of a cargo truck. It adopts a high-tech designed swinging hook arm, which can carry multiple large carriages in one vehicle, making loading and unloading convenient and achieving secondary lifting of carriages.

Usage effect: The use of hook arm garbage trucks not only improves work efficiency, reduces labor costs, and alleviates the burden on staff, but also effectively prevents secondary pollution during loading and transportation.


The design and functionality of this vehicle make it an ideal replacement for dump trucks as a new type of construction waste, household waste collection, and building material transportation tool.

In summary, the hook arm garbage truck provides an effective solution for garbage disposal in urban sanitation and construction projects through its unique design and efficient operation

Main Technical specification

Overview	
Name	26 Tons hook lifting truck
Dimension(LxWxH)	9650x2550x3200 mm
Total Mass	31000 kg
Rated Payload	13100 kg
Kerb Weight	17770 kg
Passenger	3
Approach/Departure Angle	17°/10 °
The Parameters of Chassis	
Manufacture/Model	MC07.34-60
Driving Type	8x4
Wheel Base	1800+3800+1350 mm
Gearbox	HW19710
Front/Rear Track	2060/1855 mm
Tyre model	11.00R20
The Number of Tyre	12+1 (spare tyre)
Front/Rear Suspension	1450/1252 mm
The Parameters of Engine	
Manufacturer/Model	MC07.34-60
Rated Power	250kw/340hp
Fuel Type	Diesel oil
Displacement/Capacity	6870 ml
Emission Standard	Eu 6
Cylinder	6
Max. Torque/ speed	1250 N.m/ 1200 -1800 rpm
Velocity	2200 rpm
Loading weight	26T
Chassis	GVW:31000KG,8x4
Hook type	Extend
Hook height	1570 mm
Hook center to roller center distance	mm
Corresponding box length	4250-6500mm
Horizontal movement distance of hook arm	mm
Box track width	mm
Tilt angle	48°
Equipment weight	2000KG
Whole machine weight	2350KG
Maximum system pressure	32MPa
Recommended traffic	110L/min
Standard 140L fuel tank assembly	yes

Hook Arm Lifting Garbage Truck Picture

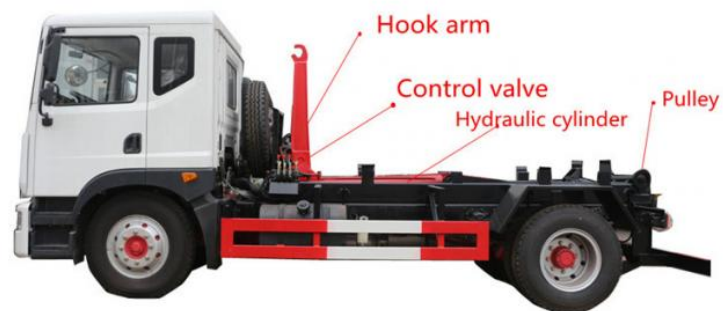

Hook Arm Lifting Garbage Truck Details



Export





Hubei iTruck Import and Export Trading Co., Ltd



0086 19947597881



alex@hbitruck.com



hbitruck.com

ROOM B1084 FLOOR 9TH-14TH, BUILDING A, BAOYE CENTER, NO. 31ST, JIANSHE FIRST ROAD,
QINGSHAN DISTRICT, WUHAN